

RUNERGY

Preliminary Version

TIER 1 HY-DH132N11 590-615W

22.8%

Max. Efficiency

N-Type

Bifacial & Dual Glass

132 Pieces

Half-Cell



High Conversion Efficiency

Module efficiency up to 22.8% based on N-Type wafer and advanced N-Type cell technology



Excellent Energy Yield

More power output in field operation due to better thermal behaviors, weak-light performance and bifaciality





Outstanding Anti-degradation

Unsusceptible to LID, LeTID and less annual degradation due to special characteristics of N-Type



Quality Guarantee

High module quality ensures long-term reliability

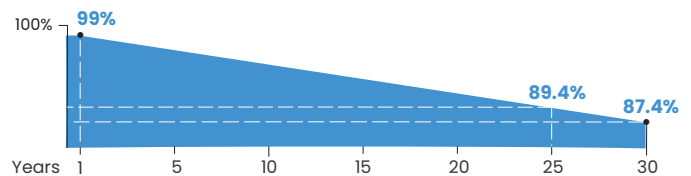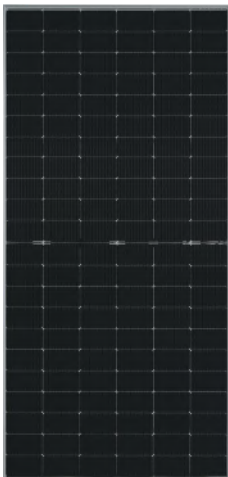

Runergy N-Type Dual Glass Product Performance Warranty

- **12 Years** warranty for materials and workmanship
- **30 Years** warranty for extra linear power output
- 1st year < **1%**, annual degradation < **0.4%**

IEC61215 / IEC61730 / UL61730 / IEC61701 / IEC62716 / IEC60068 / ISO9001 / ISO14001 / ISO45001




www.runergy.com
sales-inform@runergy.com

Mechanical Parameters

Solar Cell	Mono N-Type 182*210 mm
No. of Cells	132 (6 × 22)
Dimensions	2382 × 1134 × 30mm(93.78 × 44.65 × 1.18in.)
Weight	33.7kg(74.30lbs)
Junction Box	IP68 rated (3 bypass diodes)
Output Cable	4mm ² (IEC), 12 AWG(UL) +400/-200mm (+15.75/-7.87in.) or customized
Connector	RY01/EVO2 or similar
Front Cover	2.0mm (0.079in.)semi-tempered AR glass
Back Cover	2.0mm (0.079in.)semi-tempered glass
Container	36 pcs/Pallet, 720 pcs/40' HQ

Operating Parameters

Max. System Voltage	DC 1500V (IEC/UL)
Operating Temperature	-40°C ~ +85°C(-40°F ~ +185°F)
Max. Fuse Rating	30A
Frontside Max. Loading	5400Pa(112lb/ft ²)
Backside Max. Loading	2400Pa(50lb/ft ²)
Bifaciality	80%±10%
Fire Resistance	IEC Class A

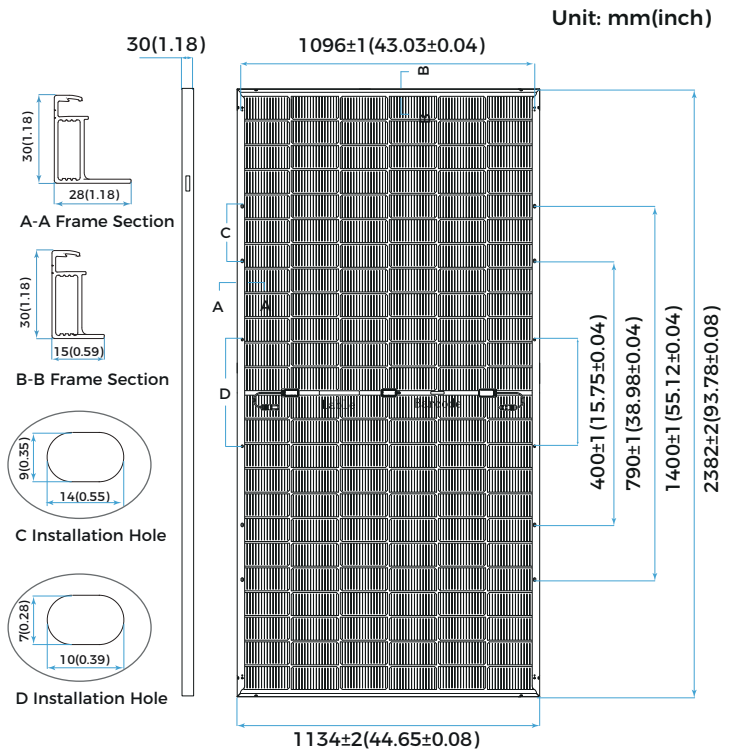

Electrical Characteristics - STC

Irradiance 1000 W/m², cell temperature 25 °C, AM1.5, Test uncertainty for Pmax: ±3%

	615	610	605	600	595	590
Maximum Power at STC (Pmax/W)	615	610	605	600	595	590
Power Tolerance (W)	0 ~ +5					
Optimum Operating Voltage (Vmp/V)	41.06	40.78	40.50	40.22	39.94	39.66
Optimum Operating Current (Imp/A)	14.98	14.96	14.94	14.92	14.90	14.88
Open Circuit Voltage (Voc/V)	48.71	48.51	48.31	48.11	47.91	47.71
Short Circuit Current (Isc/A)	15.87	15.84	15.81	15.78	15.75	15.72
Module Efficiency	22.8%	22.6%	22.4%	22.2%	22.0%	21.8%

Electrical Characteristics - NMOT

Irradiance 800 W/m², ambient temperature 20 °C, AM1.5, wind speed 1 m/s.

	471.1	467.2	463.4	459.6	455.8	452.0
Maximum Power at NMOT (Pmax/W)	471.1	467.2	463.4	459.6	455.8	452.0
Optimum Operating Voltage (Vmp/V)	39.31	39.05	38.78	38.51	38.24	37.97
Optimum Operating Current (Imp/A)	11.98	11.97	11.95	11.93	11.92	11.90
Open Circuit Voltage (Voc/V)	46.64	46.45	46.26	46.07	45.87	45.68
Short Circuit Current (Isc/A)	12.79	12.77	12.74	12.72	12.70	12.67

Rearside Power Gain (Reference to 615W Front)

	5%	15%	25%
Rearside Power Gain	5%	15%	25%
Maximum Power (Pmax/W)	646	707	769
Optimum Operating Voltage (Vmp/V)	41.06	41.16	41.16
Optimum Operating Current (Imp/A)	15.73	17.18	18.68
Open Circuit Voltage (Voc/V)	48.71	48.81	48.81
Short Circuit Current (Isc/A)	16.66	18.21	19.79
Module Efficiency	23.9%	26.2%	28.5%

Temperature Characteristics

Nominal Module Operating Temperature	42 ± 2 °C
Nominal Cell Operating Temperature	45 ± 2 °C
Temperature Coefficient of Pmax	-0.29%/°C
Temperature Coefficient of Voc	-0.25%/°C
Temperature Coefficient of Isc	0.045%/°C

